



LOUIE VISION

RESEARCH AND
DEVELOPMENT PRODUCTION
MANUFACTURING AND SALES



TO BE THE LEADER OF
TEMPERATURE CONTROL
EQUIPMENT TECHNOLOGY IN CHINA



Nanjing Louie Vision Trading Company Ltd.

 **Web:** njlv machines.com

 **Add:** No. 59-2 Xiushan Road, Gaochun District, Nanjing, Jiangsu

 **Email:** richard@njlv machines.com

Nanjing Louie Vision Trading Company Ltd.



TO SURVIVE WITH
QUALITY, DEVELOP BY
INNOVATION, ACHIEVE
BRAND VIA FAITH AND
ENHANCE
WORD-OF-MOUTH
THROUGH SERVICE.

CONTENTS

COMPANY INTRODUCTION	01
COMPANY HONORS	02
WATER TEMPERATURE CONTROL UNIT	03
*LRD series (98°C) / LWM series (120°C) / LEWT series (180°C)	
OIL TEMPERATURE CONTROL UNIT	06
*LOS series (200°C) / LEOT series (300°C) / LDDC series (350°C)	
AIR PACKAGED CHILLER	09
*Bs series Air(-60°C/25°C)	
WATER PACKAGED CHILLER	11
*Bs series Water(-60°C/25°C)	
AIR COOLED SCREW CHILLER	13
*Bsl series single compressor(-60°C/25°C)	
WATER COOLED SCREW CHILLER	15
*Bsl series single/double compressor(-60°C/25°C)	
FIGURE OF NON-STANDARD MACHINE	18
APPLICATIONS CASES	20



COMPANY INTRODUCTION

Nanjing Louie Vision Trading Company Ltd was established in June 2025 and is a wholly-owned subsidiary of Jiangsu Rongyida Co., Ltd. Since its establishment, relying on the solid industrial foundation and strong comprehensive strength of its parent company, the company has steadily expanded in the field of temperature control equipment trading, with a rich product line and professional services.

The company focuses on the operation of cold and hot temperature control equipment, covering multiple categories such as cold and hot integrated machines, oil circulation temperature control machines, water circulation temperature control machines, industrial chillers, cold oil machines, and screw chillers. With stable performance and wide applicability, it can meet the temperature control needs of many industries in conventional production and operation, providing strong support for the smooth progress of production processes.

The company has a deep understanding of the production characteristics and temperature control pain points of various industries. Through a professional technical team, it provides customers with targeted equipment selection suggestions and perfect after-sales services, thus winning the trust and recognition of customers.

Looking forward to the future, Jiangsu Louie Vision Trading Co., Ltd. will continue to rely on the advantages of its parent company, constantly enrich its product system, and strive to provide better and more professional temperature control equipment and services for more industries, contributing to the high-quality development of various industries.



COMPANY HONORS



LOUIE VISION

Web: njlvmachines.com

WATER TEMPERATURE CONTROL UNIT ---LRD SERIES(98°C)

WATER TEMPERATURE CONTROL UNIT ---LWM SERIES(120°C)

Features:

Temperature control range: Inlet water temperature +15°C ~ 98°C
Return water temperature gauge
Heating power change-over function
Start-up automatic exhaust function
Hot water BY-PASS pressure relief loop
Stainless steel pipeline to reduce pipe resistance and rust deposit
Brands of electrical appliances: SIEMENS, OMRON, FUJI, ABB, Schneider
Disconnecting control box for electrical equipment to prolong service life if the electrical equipment
Multi-point temperature control unit (customized)
Water pump horsepower and heating power (customized)
Explosion-proof equipment (optional)
Air blowing and return water function (optional)
Negative pressure system operation (optional)
Instant cooling shut-down function (optional)
RS485 communication function, realization of automatic management (optional)
Control method: imported microcomputer or PLC (optional) control
Perfect safety protection, fault display, maintenance without professionals



Features:

Temperature control range: Inlet water temperature +15°C ~ 120°C
Return water temperature gauge
Heating power change-over function
Start-up automatic exhaust function
Hot water BY-PASS pressure relief loop
Stainless steel pipeline to reduce pipe resistance and rust deposit
Brands of electrical appliances: SIEMENS, OMRON, FUJI, ABB, Schneider
Disconnecting control box for electrical equipment to prolong service life if the electrical equipment
Multi-point temperature control unit (customized)
Water pump horsepower and heating power (customized)
Explosion-proof equipment (optional)
Air blowing and return water function (optional)
Negative pressure system operation (optional)
Instant cooling shut-down function (optional)
RS485 communication function, realization of automatic management (optional)
Control method: imported microcomputer or PLC (optional) control
Perfect safety protection, fault display, maintenance without professionals

Model		Specifications					
Parameter		LRD-40	LRD-50-40	LRD-50-60	LRD-75-45	LRD-75-60	LRD-100
Temp control range				Inlet water temperature+15℃～98℃			
Temp control accuracy				PID±1℃			
Power supply				AC3Φ380V/50HZ			
Heat transfer medium				Water			
Cooling method			Direct cooling (Indirect cooling can be customized)				
Heating power (KW)	18/24	30/40	45/60	45/60	60/75		75/96
Pump horsepower (HP)	4	5	5	7.5	7.5		10
Pump flow (L/min)	165	205	205	415	415		450
Pump pressure (KG/cm ²)	4	4	4	5	5		6
Max power consumption(KW)	21/26	34/44	49/64	50/65	66/81		83/102
Alert function			Pump reversal/Water shortage/Overheating/Overload/Abnormal heating				
Cooling water pipe (inch)	1/2	3/4	3/4	1	1	1	1
Circulation water pipe (inch)	1	1	1	2	2	2	2.5
Size(L*W*H)(mm)	1110*420*1110	1110*420*1110	1200*500*1260	1200*500*1260	1670*550*1360	1670*550*1360	1670*550*1360
Weight (KG)	120	150	170	180	200	220	220

Specification parameters and dimensions are subject to change due to product improvement without notice.

Specification parameters and dimensions are subject to change due to product improvement without notice.

Model		Specifications					
Parameter		LWM-05	LWM-10	LWM-20	LWM-30	LWM-50	LWM-75
Temp control range					Inlet water temperature+15℃ - 120℃		
Temp control accuracy					PID± 1℃		
Power supply					AC3Φ380V 50Hz		
Heat transfer medium					Water		
Cooling method			Direct cooling（ Indirect cooling can be customized ）				
Heating power (KW)		6	9	12/18	24/36	45/60	75/90
Pump horsepower (HP)		0.5	1	2	3	5	7.5
Pump flow (L/min)		95	165	236	315	385	415
Pump pressure (KG/cm ²)		2	2.2	2.4	2.6	2.8	3
Max power consumption(KW)		7	10	13/19	20/38	49/64	80/95
Alert function		Pump reversal/Water shortage/Overheating/Abnormal heating					
Cooling water pipe (inch)		1/2	1/2	1/2	1/2	3/4	1
Circulation water pipe (inch)		1/2	3/4	1	1.2	1.5	2
Size(L*W*H) (mm)		650*280*520	625*325*650	850*400*900	1110*420*1110	1200*500*1260	1670*550*1360
Weight (KG)		62	68	75	90	150	180
Specification parameters and dimensions are subject to change due to product improvement without notice.							

Specification parameters and dimensions are subject to change due to product improvement without notice.



LOUIE VISION

Web: njlvmmachines.com



WATER TEMPERATURE CONTROL UNIT ---LEWT SERIES(180°C)

Features:

- Temperature control range:inlet water temperature+15°C ~ 150°C /180°C
- Return water temperature gauge
- Heating power change-over function
- Start-up automatic exhaust function
- Hot water BY-PASS pressure relief loop
- Stainless steel pipeline to reduce pipe resistance and rust deposit
- Brands of electrical appliances:SIEMENS,OMRON,FUJI,ABB,Schneider
- Disconnecting control box for electrical equipment to prolong service life if the electrical equipment
- Multi-point temperature control unit(customized)
- Water pump horsepower and heating power(customized)
- Explosion-proof equipment(optional)
- Air blowing and return water function(optional)
- Negative pressure system operation(optional)
- Instant cooling shut-down function(optional)
- RS485 communication function, realization of automatic management(optional)
- Control method:imported microcomputer or PLC (optional) control
- Perfect safety protection, fault display, maintenance without professionals



OIL TEMPERATURE CONTROL UNIT ---LOS SERIES(200°C)

Features:

- Temperature control range:inlet water temperature+25°C ~ 200°C
- Return oil temperature gauge
- Heating power change-over function
- Start-up automatic exhaust function
- Hot oil BY-PASS pressure relief loop
- Stainless steel pipeline to reduce pipe resistance and rust deposit
- Brands of electrical appliances:SIEMENS,OMRON,FUJI,ABB,Schneider
- Disconnecting control box for electrical equipment to prolong service life if the electrical equipment
- Multi-point temperature control unit(customized)
- Oil pump horsepower and heating power(customized)
- Explosion-proof equipment(optional)
- Air blowing and return oil function(optional)
- Negative pressure system operation(optional)
- Instant cooling shut-down function(optional)
- RS485 communication function, realization of automatic management(optional)
- Control method:imported microcomputer or PLC (optional) control
- Perfect safety protection, fault display, maintenance without professionals



Paramente	Model	Specifications					
		LEWT-10	LEWT-20	LEWT-30	LEWT-50	LEWT-75	LEWT-100
Temp control range							
Temp control accuracy							
Power supply							
Heat transfer medium							
Cooling method							
Heating power (KW)		9/12	12/18	24/30	36/45	60/75	96/120
Pump horsepower (HP)		1	2	3	5	7.5	10
Pump flow (L/min)		95	153	235	315	415	500
Pump pressure (KG/cm ²)		6	6	6	12	12	12
Max power consumption(KW)		10/11	14/20	27/33	40/49	65/81	104/127
Alert function							
Cooling water pipe (inch)		1/2	1/2	1/2	3/4	1	1
Circulation water pipe (inch)		1	1	1.2	1.5	2	2.5
Size(L*W*H)(mm)		755*360*850	755*360*850	1110*420*1110	1200*500*1260	1200*500*1260	1670*550*1360
Weight (KG)		75	85	95	110	150	200

Specification parameters and dimensions are subject to change due to product improvement without notice.

Paramente	Model	Specifications					
		LOS-05	LOS-10	LOS-20	LOS-30	LOS-50	LOS-75
Temp control range							
Temp control accuracy							
Power supply							
Heat transfer medium							
Cooling method							
Heating power (kW)		6	9	9/12	18/24	40/60	75/96
Pump horsepower (HP)		0.5	1	2	3	5	7.5
Pump flow (L/min)		30	85	120	165	240	300
Pump pressure (KG/cm ²)		1.5	1.8	2	2.2	2.6	3
Max power consumption(KW)		7	10	11/14	21/27	44/64	81/101
Expansion tanks capacity		8	8	35	35	50	100
Alert function							
Cooling water pipe (inch)		1/2	1/2	1/2	1/2	1/2	3/4
Circulation oil pipe (inch)		1/2	3/4	1	1.2	1.5	2
Size(L*W*H)(mm)		635*325*750	635*325*750	850*400*900	1110*420*1110	1670*550*1360	1950*700*1750
Weight (KG)		65	75	85	110	160	240

Specification parameters and dimensions are subject to change due to product improvement without notice.



LOUIE VISION

Web: njlvmachines.com

OIL TEMPERATURE CONTROL UNIT ---LEOT SERIES(300°C)



Features:

Temperature control range: Inlet water temperature+45°C ~ 300°C
Return oil temperature gauge
Heating power change-over function
Start-up automatic exhaust function
Hot oil BY-PASS pressure relief loop
Stainless steel pipeline to reduce pipe resistance and rust deposit
Brands of electrical appliances: SIEMENS, OMRON, FUJI, ABB, Schneider
Disconnecting control box for electrical equipment to prolong service life if the electrical equipment
Multi-point temperature control unit (customized)
Oil pump horsepower and heating power (customized)
Explosion-proof equipment (optional)
Air blowing and return oil function (optional)
Negative pressure system operation (optional)
Instant cooling shut-down function (optional)
RS485 communication function, realization of automatic management (optional)
Control method: imported microcomputer or PLC (optional) control
Perfect safety protection, fault display, maintenance without professionals

Parameter	Model	Specifications									
		LEOT-10	LEOT-20	LEOT-30	LEOT-40	LEOT-50	LEOT-75	LEOT-100	LEOT-150		
Temp control range		Inlet water temperature+45°C ~ 300°C									
Temp control accuracy		PID±1°C									
Power supply		AC3Φ380V 50HZ									
Heat transfer medium		Conduction oil									
Cooling method		Indirect cooling									
Heating power (KW)	12/18	18/24	30/40	40/45	45/60	75/60	75/60	80/96	120/150		
Pump horsepower (HP)	1	2	3	4	5	7.5	10	10	15		
Pump flow (L/min)	35	110	165	210	265	300	500	500	750		
Pump pressure (KG/cm ²)	1.5	1.8	2	2.2	2.6	2.8	3	3	4		
Max power consumption (KW)	13/19	20/26	32/42	43/48	49/64	81/86	87/103	132/162	132/162		
Expansion tanks capacity	35	35	35	50	90	90	200	200	200		
Alert function		Pump reversal/Oil shortage/Overheating/Overload/Abnormal heating/Trip power outage									
Cooling water pipe (inch)	1/2	1/2	1/2	1/2	1	1	1	1	1		
Circulation oil pipe (inch)	1	1	1-1/2	1-1/2	1-1/2	2	2	2	2-1/2		
Size(L*W*H) (mm)	1110*420*1110	1110*420*1110	1200*500*1260	1200*500*1260	1670*550*1360	1670*550*1360	1670*550*1360	1950*700*1740	1950*700*1740		
Weight (KG)	110	120	130	150	160	210	320	320	450		

Specification parameters and dimensions are subject to change due to product improvement without notice.

OIL TEMPERATURE CONTROL UNIT ---LDDC/LDDM SERIES(350°C)



Features:

Temperature control range: Inlet water temperature+45°C ~ 350°C
Return oil temperature gauge
Heating power change-over function
Start-up automatic exhaust function
Hot oil BY-PASS pressure relief loop
Stainless steel pipeline to reduce pipe resistance and rust deposit
Brands of electrical appliances: SIEMENS, OMRON, FUJI, ABB, Schneider
Disconnecting control box for electrical equipment to prolong service life if the electrical equipment
Multi-point temperature control unit (customized)
Oil pump horsepower and heating power (customized)
Explosion-proof equipment (optional)
Air blowing and return oil function (optional)
Negative pressure system operation (optional)
Instant cooling shut-down function (optional)
RS485 communication function, realization of automatic management (optional)
Control method: imported microcomputer or PLC (optional) control
Perfect safety protection, fault display, maintenance without professionals

Model		Specifications					
Parameter		LDDC-18	LDDC-36	LDDC-48	LDDM-18	LDDM-36	LDDM-48
Temp control range		Inlet water temperature+45℃ ~ 350℃					
Temp control accuracy		PID± 1℃					
Power supply		AC3Φ380V 50HZ					
Heat transfer medium		Conduction oil					
Cooling method		Indirect cooling					
Heating power(KW)		18	36	48	18+18	36+36	48+48
Pump horsepower (HP)		0.55	1.1	2.8	0.55+0.55	1.1+1.1	2.8+2.8
Pump flow (L/min)		30	60	100	30+30	60+60	100+100
Pump pressure(KG/cm ²)		4	4	6	4+4	4+4	6+6
Max power consumption(KW)		19	38	51	38	75	102
Expansion tanks capacity		35	35	50	70	70	100
Alert function		Pump reversal/Oil shortage/Overheating/Overload/Abnormal heating/Trip power outage					
Cooling water pipe (inch)		1/2	1/2	3/4	1	1	1-1/4
Circulation oil pipe (inch)		1	1	1-1/2	1×2	1×2	1-1/2×2
Size(L*W*H) (mm)		1110*420*1110	1200*500*1260	1200*500*1260	1670*600*1360	1670*600*1360	1670*650*1410
Weight (KG)		120	150	180	220	280	340

Specification parametered dimensions are subject to change due to product improvement, without notice.

Specification parameters and dimensions are subject to change due to product improvement without notice.



LOUIE VISION

Web: njlvmachines.com


AIR PACKAGED CHILLER —BS SERIES(-60°C~25°C)

Features:

- Europe and America imported compressor
- Oxygen-free welding method used for copper pipe
- Imported superior elements with long service life
- High efficient evaporator and condenser to save more than 30% energy
- Two groups of compressor head along and jointly used for C-15
- Brands of electrical appliances:SIEMENS,OMRON,FUJ,ABB,Schneider
- RS485 communication function, realization of automatic management(optional)
- Control method:imported microcomputer or PLC (optional) control



Air cooled packaged chiller system schematic diagram

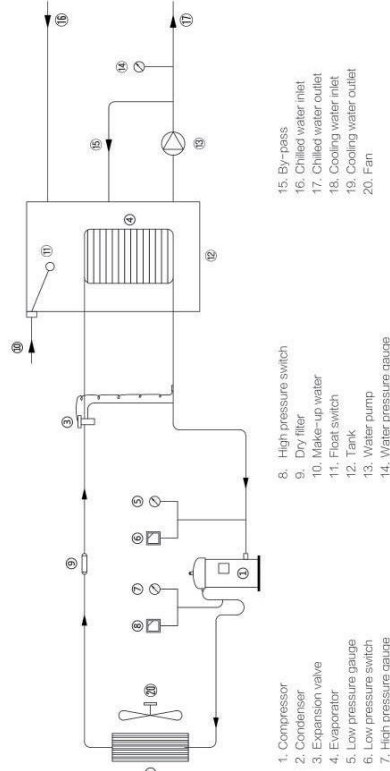

Air cooled packaged chiller — BS Series(7°C)													
Specifications													
Parameter	Model(BS-*)	01AS	02AS	03AS	05AS	08AS	10AD	12AS	15AD	20AD	25AD	30AT	40AF
Refrigeration Capacity	KW	2.1	4.3	7.9	13.2	20.5	25.2	31.7	41.0	52.8	63.4	79.2	113.0
	×10 ⁴ cal/hr	1.8	3.7	6.8	11.3	17.6	21.7	27.3	35.3	45.2	54.6	69.1	97.2
	Consumed Power(KW)	1.1	2.0	3.0	5.1	7.7	10.3	12.3	15.3	21.0	24.2	29.8	42.5
Running Amp(A)		2.3	4.0	6.1	10.2	15.5	20.7	24.6	30.6	42.1	48.5	59.6	85.8
	Number	1	1	1	1	1	2	1	2	2	2	3	4
Compressor	Power(KW)	0.67	1.50	2.55	3.96	6.11	8.06	9.5	12.22	15.84	19.00	23.76	34.10
	Current(A)	1.4	3.0	5.1	8.0	12.3	16.3	19.2	24.6	31.7	38.4	47.52	68.8
Refrigerating Fluid	Type	R22 (Environmental friendly refrigerant R407C can be choosed)											
	Control Mode	External equalizer thermostatic expansion valve											
	Type	High efficiency, low noise centrifugal pumps											
	Power(KW)	0.37	0.37	0.37	0.55	0.75	1.1	1.5	1.5	2.2	2.2	3	4
	Head(m)	3.6	3.6	3.6	3.6	3.6	6	15	15	15	15	25	30
Condenser	Type	High efficiency, low noise centrifugal pumps											
	Cooling Fan Number	1	1	1	1	2	2	2	2	2	2	3	8
	Single Fan Power(KW)	0.09	0.11	0.3	0.55	0.42	0.55	0.65	0.8	1.5	1.5	1.5	0.55
	Air Volume(m ³ /h)	1700	2800	4300	6500	11000	13000	15000	18000	26000	26000	36000	48000
	Water Pipe	DN25	DN25	DN25	DN25	DN25	DN25	DN32	DN32	DN40	DN40	DN50	DN65
Evaporator	Water Flow (m ³ /h)	0.5	0.8	1.5	2.5	4	5.1	6	7.6	10.2	12.5	15	20
	Tank Volume(L)	25	25	55	75	120	150	150	200	300	300	350	500
	Length (mm)	830	800	850	900	1350	1450	1450	1600	2120	2120	2550	2800
	Width (mm)	630	600	700	700	750	750	800	850	1100	1100	1200	1800
	High (mm)	815	1100	1400	1550	1500	1500	1630	1710	2100	2100	2100	1840
Size	Total Weight(KG)	65	80	150	200	280	350	450	600	830	1050	1250	1350

Remarks:
1.The table cooling conditions: chilled water inlet temperature 12°C, the outlet temperature 7°C,air temperature 35°C;
2.Power Supply: 3P~380V-50Hz,allowing voltage fluctuation ±10%. Allow the voltage difference ±2%;
3.The above data refer to refrigerant R22, if you need refrigerant R407C or other refrigerants,contact us;
4.Specification parameters and dimensions are subject to change due to product improvement without notice.

Air cooled packaged chiller chiller –BS Series(–5°C)												
Specifications												
Parameter	Model(BS-*)	03ASM	05ASM	08ASM	10ADM	12ASM	15ADM	20ADM	25ADM	30ATM	40AFM	
Refrigeration Capacity	KW	4.7	7.5	11.8	16.0	18.0	22.7	32.0	36.0	45.4	61.6	
	×10 ⁴ cal/hr	4.0	6.5	10.1	13.8	15.5	19.5	27.5	31.0	39.0	53.0	
	Consumed Power(KW)	3.5	5.2	7.7	10.0	11.9	15.3	20.0	23.8	30.6	40.4	
Running Amp(A)		7.0	10.5	15.5	20.2	24.0	30.9	40.4	48.0	61.8	81.5	
	Number	1	1	1	2	1	2	2	2	3	4	
	Power(KW)	2.5	4.1	6.1	7.8	8.8	12.2	15.6	17.6	24.4	32.0	
Compressor	Current(A)	5.0	8.3	12.3	15.7	17.8	24.6	31.5	35.5	48.3	64.6	
	Type	R22 (Environmental friendly refrigerant R407C can be choosed)										
	Control Mode	External equalizer thermostatic expansion valve										
Refrigerating Fluid	Type	High efficiency, low noise centrifugal pumps										
	Power(KW)	0.37	0.55	0.75	1.1	1.5	1.5	2.2	2.2	3	4	
	(m ³ /h)	3.6	3.6	3.6	6	15	15	15	15	25	30	
Pump	Head(m)	15	20	25	20	20	20	25	25	24	25	
	Type	High-efficiency internal thread finned type heat exchanger										
	Cooling Fan Number	1	1	2	2	2	2	2	2	3	8	
Condenser	Single Fan Power(KW)	0.3	0.55	0.42	0.55	0.85	0.8	1.5	1.5	1.5	0.55	
	Air Volume(m ³ /h)	4300	6500	11000	13000	15000	18000	26000	26000	36000	48000	
		DN25 DN32 DN40										
Evaporator	Water Flow (m ³ /h)	1.0	1.5	2.1	3.0	3.4	4.3	6.0	6.8	9.2	12.0	
	Trank Volume(L)	50	75	120	120	160	160	250	300	300	500	
	Length (mm)	850	900	1350	1450	1450	1600	2120	2120	2550	2800	
Size	Width (mm)	700	700	750	750	800	850	1100	1100	1200	1800	
	High (mm)	1400	1550	1500	1500	1630	1710	2100	2100	2130	1840	
	Total Weight(KG)	150	200	280	350	450	600	830	1050	1250	1350	

Remarks:
1.The table cooling conditions: chilled glycol aqueous solution inlet temperature 0°C, the outlet temperature -5°C, air temperature 35°C;
2.Power Supply: 3P~380V-50Hz,allowing voltage fluctuation ±10%. Allow the voltage difference ±2%;
3.The above data refer to refrigerant R22, if you need refrigerant R407C or other refrigerants,contact us;
4.Specification parameters and dimensions are subject to change due to product improvement without notice.



LOUIE VISION

Web: njlvmmachines.com


WATER PACKAGED CHILLE ---BS SERIES (-60°C~25°C)



Features:

- Europe and America imported compressor
- Oxygen-free welding method used for copper pipe
- Imported superior elements with long service life
- High efficient evaporator and condenser to save more than 30% energy
- Two groups of compressor head along and jointly used for C-15
- Brands of electrical appliances:SIEMENS,OMRON,FUJI,ABB,Schneider
- RS485 communication function, realization of automatic management(optional)
- Control method:imported microcomputer or PLC (optional) control

Water cooled packaged chiller system schematic diagram

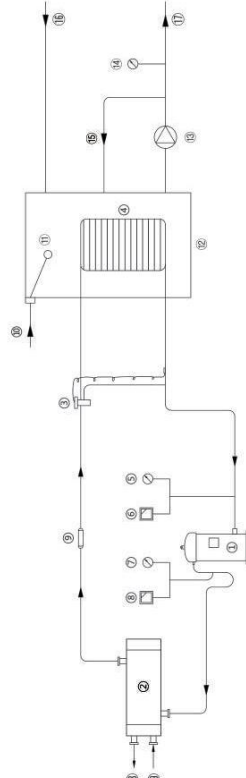

- Compressor
- Condenser
- Expansion valve
- Evaporator
- Low pressure gauge
- Low pressure switch
- High pressure gauge
- High pressure switch
- Dry filter
- Make-up water
- Float switch
- Tank
- Water pump
- Water pressure gauge
- By-pass
- Chilled water inlet
- Chilled water outlet
- Cooling water inlet
- Cooling water outlet
- Fan

Water cooled packaged chiller – BS Series(7°C)

		Specifications										
Parameter	Model(BS-*)	03WS	05WS	08WS	10WD	12WS	15WD	20WD	25WD	30WT	40WF	
Refrigeration Capacity	KW	9.2	15.3	24.6	32.5	37.6	48.5	65.0	75.2	97.0	132.6	
	×10 ³ kcal/hr	7.9	13.2	21.2	28.0	32.3	41.7	55.9	64.7	83.4	114.0	
	Consumed Power(KW)	2.6	3.8	5.7	7.6	9.0	11.6	15.1	17.9	23.3	31.6	
Running Amp(A)	Number	5.3	7.6	11.4	15.3	18.1	23.5	30.5	36.1	47.0	63.8	
	Power(KW)	1	1	1	1	1	2	2	2	3	4	
	Current(A)	2.06	3.23	4.92	6.46	7.47	10.13	12.90	14.90	20.30	27.60	
Refrigerating Fluid	Type	4.2	6.5	9.9	13.0	15.1	20.4	26.0	30.1	41.0	55.7	
	Control Mode	R22 (Environmental friendly refrigerant R407C can be choosed)										
	Type	External equalizer thermostatic expansion valve										
Pump	Power(KW)	High efficiency, low noise centrifugal pumps										
	(m ³ /h)	0.55	0.55	1.1	1.5	1.5	1.5	2.2	3	3	4	
	Head(m)	3.6	3.6	6	15	15	15	15	25	25	30	
Condenser	Water Pipe	20	20	20	20	20	20	25	24	24	25	
	Water Flow (m ³ /h)	DN25										
	Water Pipe	2	4	6	7	9	11	14	17	21	29	
Evaporator	Water Pipe	DN25										
	Water Flow (m ³ /h)	2	3	5	6	7	9	12	13	17	23	
	Tank Volume(L)	55	75	150	150	150	200	250	300	300	500	
Size	Length (mm)	900	900	1300	1300	1450	1450	1900	1900	2000	2500	
	Width (mm)	650	650	800	800	900	900	1000	1000	1000	1200	
	High (mm)	1300	1300	1500	1500	1550	1550	1800	1800	1850	1850	
Total Weight(KG)		150	220	310	360	450	650	850	1050	1250	1350	

Remarks:

- The table cooling conditions: chilled water inlet temperature 12°C, the outlet temperature 7°C, cooling water inlet temperature 30°C, the outlet temperature 35°C ;
- Power Supply: 3P-380V-50Hz,allowing voltage fluctuation ±10%. Allow the voltage difference ±2%;
- The above data refer to refrigerant R22, if you need refrigerant R407C or other refrigerants,contact us;
- Specification parameters and dimensions are subject to change due to product improvement without notice.

Water cooled packaged chiller –BS Series(-5°C)

		Specifications										
Parameter	Model(BS-*)	03WSM	05WSM	08WSM	10WSM	12WSM	15WSM	20WSM	25WSM	30WTM	40WFM	
Refrigeration Capacity	KW	5.3	8.5	12.8	17.5	20.0	25.6	35.0	40.0	51.2	70.0	
	×10³kcal/hr	4.6	7.3	11.0	15.1	17.2	22.0	30.1	34.4	44.0	60.2	
	Consumed Power(KW)	3.1	4.3	6.4	8.2	10.2	13.0	16.3	19.6	25.2	33.4	
Running Amp(A)	Running Amp(A)	6.3	8.7	12.9	16.5	20.6	26.2	32.9	39.6	50.9	67.4	
	Number	1	1	1	1	1	2	2	2	3	4	
Compressor	Power(KW)	2.6	3.8	5.7	7.1	8.7	11.5	14.1	16.6	22.2	29.4	
	Current(A)	5.1	7.6	11.4	14.2	17.6	23.2	28.5	33.5	44.8	59.3	
Refrigerating Fluid	Type	R22 (Environmental friendly refrigerant R407C can be choosed)										
	Control Mode	External equalizer thermostatic expansion valve										
	Type	High efficiency, low noise centrifugal pumps										
Pump	Power(KW)	0.55	0.55	1.1	1.5	1.5	1.5	2.2	3	3	4	
	(m³/h)	3.6	3.6	6	15	15	15	15	25	25	30	
Condenser	Head(m)	20	20	20	20	20	20	25	24	24	25	
	Water Pipe	DN25										
	Water Flow (m³/h)	1.4	2.1	3.2	4.2	4.8	6.2	8.2	9.4	12.3	16.6	
Evaporator	Water Pipe	DN25										
	Water Flow (m³/h)	1.0	1.5	2.2	3.1	3.5	4.4	6.2	7.0	9.5	12.4	
Tank	Tank Volume(L)	50	75	120	120	160	160	250	300	300	500	
	Length (mm)	900	900	1300	1300	1450	1450	1900	1900	2000	2500	
Size	Width (mm)	650	650	800	800	900	900	1000	1000	1200	1200	
	Height (mm)	1300	1300	1500	1500	1550	1550	1800	1800	1850	1850	
Total Weight(KG)		150	220	310	360	450	650	850	1050	1250	1350	

Remarks:

- The table cooling conditions: chilled glycol aqueous solution inlet temperature 0°C, the outlet temperature -5°C ,cooling water inlet temperature 30°C , the outlet temperature 35°C ;
- Power Supply: 3P-380V-50Hz,allowing voltage fluctuation ±10%. Allow the voltage difference ±2%;
- The above data refer to refrigerant R22, if you need refrigerant R407C or other refrigerants,contact us;
- Specification parameters and dimensions are subject to change due to product improvement without notice.



LOUIE VISION

Web: njlvmachines.com


AIR COOLED SCREW CHILLER ——BSL SERIES (-60°C~25°C)



Features:

- Excellent performance and easy installation
- Europe and America imported compressor
- Oxygen-free welding method used for copper pipe
- Imported superior elements with long service life
- High efficient evaporator and condenser to save more than 30% energy
- Brands of electrical appliances:SIEMENS,OMRON,FUJI,ABB,Schneider
- RS485 communication function, realization of automatic management(optional)
- Control method:imported PLC control
- Perfect safety protection, fault display, low cost for operation and maintenance

Air cooled screw chiller system schematic diagram

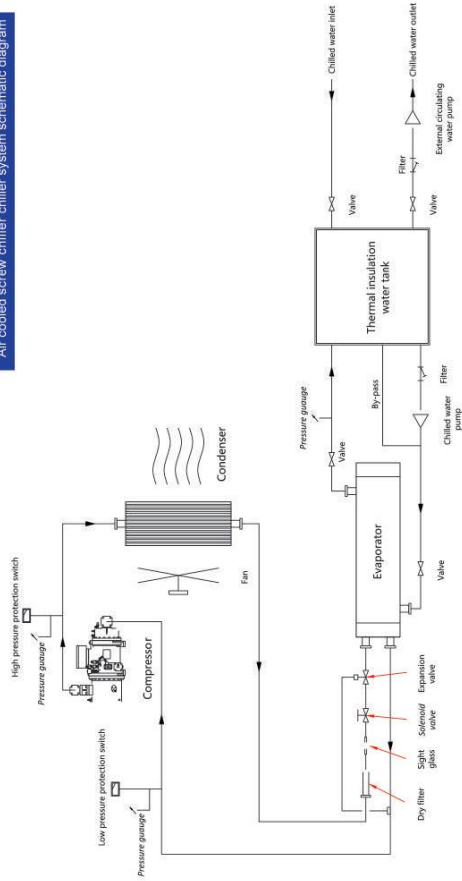

Air cooled screw chiller — BSL Series(Single compressor/7°C)												
Parameter	Model(BSL-1)	Specifications										
		100ASE	140ASE	180ASE	200ASE	230ASE	260ASE	300ASE	310ASE	340ASE		
Refrigeration Capacity	KW	87.0	117.0	155.0	165.0	200.0	224.0	260.0	278	305.0		
	x 10 ³ kcal/hr	75.0	101.0	133.0	142.0	172.0	193.0	224.0	239	262.0		
Compressor	Type	Twin-screw semi-hermetic compressor advanced in the world										
	Start Mode	Star-Delta Starting										
	Input Power(KW)	28.4	37.4	46.9	51.5	62.7	68.3	77.0	80.8	89.0		
	Operation Current(A)	47.8	62.9	78.9	88.0	105.3	114.7	130.0	135.9	149.6		
Refrigerating Fluid	Volume Control	0-33-66-100% (33%for Start-up)										
	Type	R22/ Environmental friendly refrigerant R407C can be choosed)										
	Control Mode	External equalizer thermostatic expansion valve										
	Type	High efficiency internal thread finned type heat exchanger										
Condenser	Cooling Fan Number	6	6	6	6	8	6	4	8	6		
	Single Fan Power(KW)	0.42	0.55	0.8	0.85	0.8	1.1	1.5	1.1	0.7		
	Air Volume(m ³ /h)	39000	45000	57000	64800	76000	93000	100000	100000	111000		
	Type	High efficiency tube and shell heat exchanger										
Evaporator	Water Pipe	DN50	15	20	27	28	34	39	45	48	52	
	Water Flow(m ³ /h)											
	Water Pressure Drop(kpa)											
Safety Protection Device		High&low pressure protection,anti-freezing and anti-heating protection,safety valve, overload protection,incomplete phase protection,opposite phase protection, lacking voltage and over voltage protection,water flow protection,etc.										
		35-45										
	Length (mm)	2500	3000	3300	3000	3000	3000	3000	3000	3750		
	Width (mm)	1200	1300	1300	1800	2000	2000	2300	2300	2300	2300	
Size	High (mm)	2250	2250	2450	2350	2300	2300	2400	2400	2400	2400	
	Total Weight(KG)	1820	2000	2200	2450	2600	2800	3000	3250	3500		
	Running Weight(KG)	1950	2100	2300	2600	2750	2950	3150	3450	3700		
Remarks:												
1.The table cooling conditions: chilled water inlet temperature 12°C, the outlet temperature 7°C, air temperature 35°C;												
2.Power Supply: 3P-380V-50Hz,allowing voltage fluctuation ±10%. Allow the voltage difference ±2%;												
3.The above data refer to refrigerant R22. If you need refrigerant R407C or other refrigerants,please contact;												
4.Specification parameters and dimensions are subject to change due to product improvement without notice.												

Air cooled screw chiller — BSL Series(Single compressor/-5°C)												
Parameter	Model(BSL-1)	Specifications										
		100ASEM	140ASEM	180ASEM	200ASEM	230ASEM	260ASEM	300ASEM	310ASEM	340ASEM		
Refrigeration Capacity	KW	48.0	65.0	85.0	93.0	115.0	125.0	150.0	155	170.0		
	x 10 ³ kcal/hr	41.0	55.0	73.0	79.0	98.0	107.0	129.0	133.0	146.0		
Compressor	Type	Twin-screw semi-hermetic compressor advanced in the world										
	Start Mode											
	Input Power(KW)	25.0	33.0	41.3	45.3	55.0	60.0	67.0	70.0	78.0		
	Operation Current(A)	45.0	59.0	74.0	81.0	99.0	108.0	120.0	126.0	140.0		
Refrigerating Fluid	Volume Control	0-33-66-100% (33%for Start-up)										
	Type	R22/ Environmental friendly refrigerant R407C can be choosed)										
	Control Mode	External equalizer thermostatic expansion valve										
	Type	High efficiency internal thread finned type heat exchanger										
Condenser	Cooling Fan Number	6	6	6	6	8	6	4	8	6		
	Single Fan Power(KW)	0.42	0.55	0.8	0.85	0.8	1.1	1.5	1.1	0.7		
	Air Volume(m ³ /h)	39000	45000	57000	64800	76000	93000	100000	100000	111000		
	Type	High efficiency tube and shell heat exchanger										
Evaporator	Water Pipe	DN50	12	16	22	25	30	33	40	42	50	
	Water Flow(m ³ /h)											
	Water Pressure Drop(Kpa)											
Safety Protection Device		High&low pressure protection,anti-freezing and anti-heating protection,safety valve, overload protection,incomplete phase protection,opposite phase protection, lacking voltage and over voltage protection,water flow protection,etc.										
		35-45										
	Length (mm)	2500	3000	3300	3000	3000	3000	3000	3000	3750		
	Width (mm)	1200	1300	1300	1800	2000	2000	2300	2300	2300	2300	
Size	High (mm)	2250	2250	2450	2350	2300	2300	2400	2400	2400	2400	
	Total Weight(KG)	1820	2000	2200	2450	2600	2800	3000	3250	3500		
	Running Weight(KG)	1950	2100	2300	2600	2750	2950	3150	3450	3700		
Remarks:												
1.The table cooling conditions: chilled water inlet temperature 12°C, the outlet temperature 7°C, air temperature 35°C;												
2.Power Supply: 3P-380V-50Hz,allowing voltage fluctuation ±10%. Allow the voltage difference ±2%;												
3.The above data refer to refrigerant R22. If you need refrigerant R407C or other refrigerants,please contact;												
4.Specification parameters and dimensions are subject to change due to product improvement without notice.												



LOUIE VISION


Web: njlvmachines.com

WATER COOLED SCREW CHILLER ——BSL SERIES SINGLE/DOUBLE COMPRESSOR(-60°C~25°C)

Features:

- Excellent performance and easy installation
- Europe and America imported compressor
- Oxygen-free welding method used for copper pipe
- Imported superior elements with long service life
- High efficient evaporator and condenser to save more than 30% energy
- Brands of electrical appliances:SIEMENS,OMRON,FUJI,ABB,Schneider
- RS485 communication function, realization of automatic management(optional)
- Control method:imported PLC control
- Perfect safety protection, fault display, low cost for operation and maintenance

Water cooled screw chiller chiller system schematic diagram

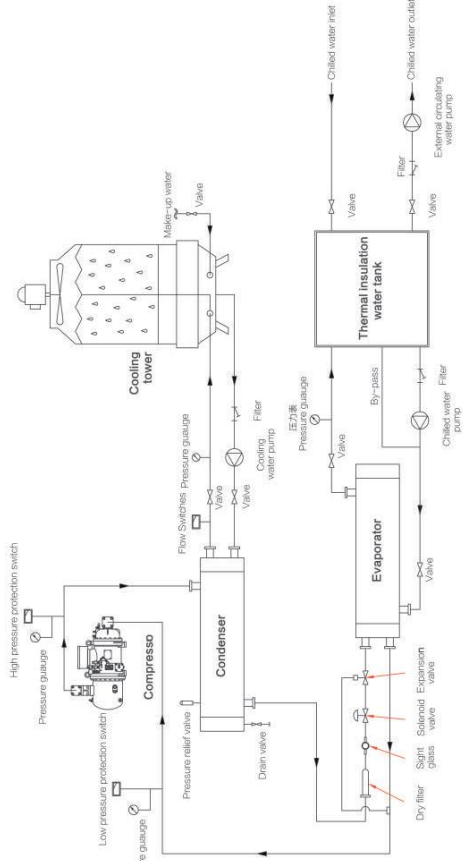

Water cooled screw chiller — BSL Series(Single compressor/7°C)													
Parameter	Model(BSL-1)	Specifications											
		100WSE	134.1	176.0	196.8	200WSE	230WSE	260WSE	300WSE	310WSE	340WSE	360WSE	400WSE
Refrigeration Capacity	KW	98.4	134.1	176.0	196.8	233.6	256.4	302.1	319.2	349.3	369.6	400.0	450.0
	× 10 ³ cal/hr	84.6	115.3	151.4	169.2	200.9	220.5	259.8	274.5	300.4	321.0	352.0	396.0
	Type	Twin-screw semi-hermetic compressor advanced in the world											
Compressor	Start Mode	Star-Delta Starting											
	Input Power(KW)	23.9	31.5	39.5	43.3	52.7	57.4	64.7	68	74.9	81.0	90.0	100.0
	Operation Current(A)	40.2	52.9	66.4	72.8	88.6	96.5	108.7	114.3	125.9	137.0	150.0	166.0
Refrigerating Fluid	Volume Control	0-33-66-100% (33%for Start-up)											
	Type	R22 (Environmental friendly refrigerant R407C can be choosed)											
	Control Mode	External equalizer thermostatic expansion valve (25%for Start-up)											
Condenser	Type	High efficiency internal thread finned type heat exchanger											
	Water Pipe	DN65											
	Water Flow(m ³ /h)	22	29	38	43	51	56	65	69	76	83	92	102
Evaporator	Water Pressure Drop(Kpa)	DN80											
	Type	High efficiency tube and shell heat exchanger											
	Water Pipe	DN80											
Safety Protection Device	Water Flow(m ³ /h)	17	24	31	34	41	45	52	55	61	67	74	81
	Water Pressure Drop(Kpa)	35-45											
	High&low pressure protection,anti-freezing and anti-heating protection,safety valve, overload protection,incomplete phase protection,opposite phase protection, lacking voltage and over voltage protection,water flow protection,etc.												
Size	Length (mm)	2150											
	Width (mm)	900											
Total Weight(KG)	High (mm)	1365											
	Low (mm)	1365											
Running Weight(KG)	High (mm)	850											
	Low (mm)	850											
Remarks:	1.The table cooling conditions: chilled water inlet temperature 12°C , the outlet temperature 7°C ,cooling water inlet temperature 30°C,the outlet temperature 35°C;												
	2.Power supply: 3P-380V-50Hz,allowing voltage fluctuation ±10%. Allow the voltage difference ±2%.												
The above data refer to refrigerant R22,if you need refrigerant R407C or other refrigerants,please contact;													
4.Specification parameters and dimensions are subject to change due to product improvement without notice.													

Water cooled screw chiller — BSL Series(Double compressor/7°C)													
Parameter	Model(BSL-1)	Specifications											
		200WDE	280WDE	360WDE	400WDE	460WDE	520WDE	600WDE	620WDE	680WDE	720WDE	760WDE	800WDE
Refrigeration Capacity	KW	196.8	268.2	352.0	383.2	467.2	512.8	604.2	638.4	698.6	748.0	808.0	868.0
	× 10 ³ cal/hr	169.2	230.7	302.7	329.6	401.8	441.0	519.6	549	600.8	640.0	680.0	720.0
	Type	Twin-screw semi-hermetic compressor advanced in the world											
Compressor	Start Mode	Star-Delta Starting											
	Input Power(KW)	47.8	63.0	79.0	86.6	105.4	114.8	129.4	136	149.8	158.0	173.0	186.0
	Operation Current(A)	80.4	105.8	132.8	145.6	177.2	193.0	217.4	228.6	251.8	264.0	288.0	306.0
Refrigerating Fluid	Volume Control	0-16.5-33-49.5-66-82.5-100% (16.5%for Start-up)											
	Type	R22 (Environmental friendly refrigerant R407C can be choosed)											
	Control Mode	External equalizer thermostatic expansion valve											
Condenser	Type	High efficiency internal thread finned type heat exchanger											
	Water Pipe	DN100											
	Water Flow(m ³ /h)	43	58	76	83	101	111	130	138	151	164	181	194
Evaporator	Water Pressure Drop(Kpa)	DN80 × 2											
	Type	45-58											
	Water Pipe	High efficiency tube and shell heat exchanger											
Safety Protection Device	Water Flow(m ³ /h)	34	47	61	66	81	89	104	110	121	132	144	156
	Water Pressure Drop(Kpa)	DN125											
	High&low pressure protection,anti-freezing and anti-heating protection,safety valve, overload protection,incomplete phase protection,opposite phase protection, lacking voltage and over voltage protection,water flow protection,etc.												
Size	Length (mm)	3300											
	Width (mm)	900											
Total Weight(KG)	High (mm)	1440											
	Low (mm)	1440											
Running Weight(KG)	High (mm)	1650											
	Low (mm)	1650											

Water cooled screw chiller — BSL Series(Double compressor/7°C)												
Parameter	Model(BSL-1)	Specifications										
		200WDE	288.2	352.0	393.2	400WDE	460WDE	520WDE	600WDE	620WDE	680WDE	350WDE
Refrigeration Capacity	KW × 10³cal/hr Type	196.8	268.2	352.0	393.2	407.2	512.8	604.2	638.4	698.6	650.8	
		169.2	230.7	302.7	329.6	401.8	441.0	519.6	549	600.8		
Compressor	Start Mode	Twin-screw semi-hermetic compressor advanced in the world										
		Star-Delta Starting										
Compressor	Input Power(KW)	47.8	63.0	79.0	86.6	105.4	114.8	129.4	136	149.8		
		80.4	105.8	132.8	145.6	177.2	193.0	217.4	228.6	251.8		
Compressor	Operation Current(A)	0-16.5-33-49.5-66-82.5-100%										
		(16.5%for Start-up)										
Compressor	Volume Control	0-12.5-25-37.5-50-62.5-75-87.5-100%										
		(12.5%for Start-up)										
Refrigerating Fluid	Type	R22 (Environmental friendly refrigerant R407C can be choosed)										
		External equalizer thermostatic expansion valve										
Refrigerating Fluid	Control Mode	High efficiency internal thread finned type heat exchanger										
		DN100										
Condenser	Water Pipe	DN80	56	76	83	101	111	130	138	151		
		43	45-58									
Condenser	Water Flow(m³/h)	High efficiency tube and shell heat exchanger										
		DN100										
Evaporator	Water Pipe	DN80	47	61	66	81	89	104	110	121		
		34	50-60									
Evaporator	Water Pressure Drop(Kpa)	High&low pressure protection,anti-freezing and anti-heating protection,safety valve, overload protection,incomplete phase protection,opposite phase protection, lacking voltage and over voltage protection,water flow protection,etc.										
		DN100										
Evaporator	Water Pressure Drop(Kpa)	DN80	3300	3300	3300	3500	3500	3800	3800	3800		
		900	900	1100	1100	1100	1300	1300	1300	1300	1300	
Size	Length (mm)	900	900	1100	1100	1100	1300	1300	1300	1300		
		1440	1440	1550	1550	1585	1765	1900	1900	1900	1970	
Total Weight(KG)	High (mm)	1440	1440	1550	1550	1585	1765	1900	1900	1900		
		1650	1850	2300	2350	2400	3000	3200	3500	4000	4000	
Total Weight(KG)	Running Weight(KG)	1650	1850	2300	2350	2400	3000	3200	3500	4000		
		1900	2150	2550	2600	2750	3550	3750	4000	4450		
Remarks:												
1.The table cooling conditions: chilled water inlet temperature 12°C , the outlet temperature 7°C ,cooling water inlet temperature 30°C,the outlet temperature 35°C												
2.Power Supply: 3P-380V-50Hz,allowing voltage fluctuation ±10%. Allow the voltage difference ±2%.												
3.The above data refer to refrigerant R22,if you need refrigerant R407C or other refrigerants,please contact;												
4.Specification parameters and dimensions are subject to change due to product improvement without notice.												



Water cooled screw chiller — BSL Series(Single compressor/-5°C)

Parameter	Specifications											
	Model(BSL-1)	100WSEM	140WSEM	160WSEM	200WSEM	230WSEM	250WSEM	300WSEM	310WSEM	340WSEM	360WSEM	380WSEM
Refrigeration Capacity	KW	55.3	75.5	99.3	108.0	132.0	145.0	170.0	180.0	197.0	214.0	231.0
	× 10 ³ kcal/hr	48.0	65.0	85.0	93.0	114.0	125.0	146.0	155.0	169.0	184.0	199.0
	Type	Twin-screw semi-hermetic compressor advanced in the world										
Compressor	Start Mode	Star-Delta Starting										
	Input Power(KW)	21.0	27.7	34.7	38.0	46.3	50.4	57.0	59.7	65.8	71.9	78.0
	Operation Current(A)	35.3	46.5	58.3	65.0	77.9	84.8	97.0	110.4	110.6	122.0	133.0
Refrigerating Fluid	Volume Control	0-33-66-100% (33%for Start-up)										
	Type	R22(Environmental friendly refrigerant R407C can be choosed)										
	Control Mode	External equalizer thermostatic expansion valve										
Condenser	Type	High efficiency internal thread finned type heat exchanger										
	Water Pipe	DN65										
	Water Pressure Drop(Kpa)	16	22	29	31	38	42	49	52	56	61	65
Evaporator	Type	High efficiency tube and shell heat exchanger										
	Water Pipe	DN50										
	Water Flow(m ³ /h)	14	19	25	27	33	37	43	45	50	55	60
Safety Protection Device	Water Pressure Drop(Kpa)	DN100										
	High/Low pressure protection	High/Low pressure protection,anti-freezing and anti-heating protection,safety valve, overload protection,high voltage protection,low voltage protection,phase protection,locking voltage and over voltage protection,water flow protection,etc.										
	Temperature protection	High/Low pressure protection,anti-freezing and anti-heating protection,safety valve, overload protection,high voltage protection,low voltage protection,phase protection,locking voltage and over voltage protection,water flow protection,etc.										
Size	Length (mm)	2150	2400	2650	2850	2900	2900	3000	3100	3100	3100	3100
	Width (mm)	900	900	900	900	900	900	1100	1100	1100	1100	1100
	High (mm)	1365	1365	1540	1540	1665	1665	1640	1730	1765	1765	1765
Total Weight(KG)	800	1000	1220	1300	1380	1620	1620	1650	1690	1780	1780	1780
	Running Weight(KG)	850	1050	1350	1430	1510	1510	1740	1800	1840	1840	1840
	2000											

Remarks:

- 1.The table cooling conditions: chilled glycol aqueous solution inlet temperature 0°C, the outlet temperature -5°C, cooling water inlet temperature 30°C, the outlet temperature 35°C;
- 2.Power Supply: 3P-380V-50Hz,allowing voltage fluctuation ±10%. Allow the voltage difference ±2%;
- 3.If you need refrigerant R407C or other refrigerants,please contact;
- 4.The above data refer to refrigerant R22. If you need refrigerant R407C or other refrigerants,please contact;
- 5.Specification parameters and dimensions are subject to change due to product improvement without notice.

Water cooled screw chiller — BSL Series(Double compressor/-5°C)

Parameter	Specifications											
	Model(BSL-1)	200WDEM	280WDEM	360WDEM	400WDEM	460WDEM	520WDEM	600WDEM	620WDEM	680WDEM	760WDEM	840WDEM
Refrigeration Capacity	KW	110.6	151.0	198.6	216.0	264.0	290.0	340.0	360	394.0	438.0	482.0
	× 10 ³ kcal/hr	95.0	130.0	171.0	186.0	227.0	249.0	292.0	310	339.0	378.0	417.0
	Type	Twin-screw semi-hermetic compressor advanced in the world										
Compressor	Start Mode	Star-Delta Starting										
	Input Power(KW)	42.0	55.4	69.4	76.0	92.6	100.8	114.0	118.4	131.6	145.6	159.6
	Operation Current(A)	70.6	93.0	116.6	130.0	155.8	169.6	194.0	220.8	221.2	250.8	275.2
Volume Control	0-16.5-33-49.5-66-82.5-100%	0-16.5-33-49.5-66-82.5-100% (16.5%for Start-up)										
	Volume Control	R22(Environmental friendly refrigerant R407C can be choosed)										
Refrigerating Fluid	Type	R22(Environmental friendly refrigerant R407C can be choosed)										
	Control Mode	External equalizer thermostatic expansion valve										
	Type	High efficiency internal thread finned type heat exchanger										
Condenser	Water Pipe	DN80										
	Water Flow(m ³ /h)	33	44	58	63	77	84	98	103	113	123	133
	Water Pressure Drop(Kpa)	45-55										
Evaporator	Type	High efficiency tube and shell heat exchanger										
	Water Pipe	DN80										
	Water Flow(m ³ /h)	28	38	50	54	67	73	86	91	99	107	115
Safety Protection Device	Water Pressure Drop(Kpa)	DN125										
	High/Low pressure protection	High/Low pressure protection,anti-freezing and anti-heating protection,safety valve, overload protection,incomplete phase protection,opposite phase protection,locking voltage and over voltage protection,water flow protection,etc.										
	Temperature protection	High/Low pressure protection,anti-freezing and anti-heating protection,safety valve, overload protection,incomplete phase protection,opposite phase protection,locking voltage and over voltage protection,water flow protection,etc.										
Size	Length (mm)	3370	3370	3300	3300	3470	3500	3780	3780	3780	3780	3780
	Width (mm)	900	900	1100	1100	1100	1100	1300	1300	1300	1300	1300
	High (mm)	1440	1440	1550	1550	1585	1585	1765	1765	1900	1900	1970
Total Weight(KG)	1550	1750	2200	2250	2300	2500	2500	3100	3100	3400	3600	3900
	Running Weight(KG)	1800	2050	2450	2500	2650	2650	3450	3550	3900	4350	4350
	4350											

Remarks:

- 1.The table cooling conditions: chilled glycol aqueous solution inlet temperature 0°C, the outlet temperature -5°C, cooling water inlet temperature 30°C, the outlet temperature 35°C;
- 2.Power Supply: 3P-380V-50Hz,allowing voltage fluctuation ±10%. Allow the voltage difference ±2%;
- 3.If you need refrigerant R407C or other refrigerants,please contact;
- 4.The above data refer to refrigerant R22. If you need refrigerant R407C or other refrigerants,please contact;
- 5.Specification parameters and dimensions are subject to change due to product improvement without notice.

FIGURE OF NON-STANDARD MACHINE

■ Explosion-proof Air-cooled Screw Chiller



■ Explosion-proof Air-cooled Chiller



■ Explosion-proof Water-cooled Chiller



■ Large Tonnage Rotary Screw Water Chiller



■ Explosion-proof Water-cooled Screw Type Water Chiller



■ Roller Head Extruder



■ Weatherproof Outdoor Enclosure





LOUIE VISION

Web: njlvmmachines.com

FIGURE OF NON-STANDARD MACHINE



LOUIE VISION

APPLICATIONS CASES



LOUIE VISION

■ Stainless Steel Water Chiller



■ Stainless Steel Mold Temperature Controller



■ Side Discharge Air-Cooled Chiller



■ Side-Discharge Air-Cooled Chiller, 25 Horsepower



■ Low-Temperature Chiller & Heater Unit



■ Multi-Channel Thermoregulator



■ Water Temperature Controller



■ Industrial Water Chiller



■ The Imperature control of SMC new material press



■ The Imperature control of large oven



■ The Imperature control of large three roll




■ The Imperature control of large press



■ The Imperature control of multi roll rubber calender



■ The Imperature control of foaming machine



■ The Imperature control of reaction kettle



■ The Imperature control of textile equipment



■ The Imperature control of mulch applicator



■ The Imperature control of high frequency welding machine



■ The Imperature control of club and swimming pool



■ The Imperature control of agitator tank

